



# S-POSTER

INDOOR FINE PIXEL PITCH ADVERTISING DISPLAY

— THE LEADER AND CREATOR OF FLIP CHIP DISPLAY PANEL —



## Excellent display effect

Stunning contrast with more bright and vivid picture



## Ultra Thin

Only 30mm thickness of display area, movable with wheels

610mm




2025.5mm

610mm



2143.5mm



30mm



USB3.0  
USB\*2  
Swither

Antenna  
Network interface  
HDMIX2  
Power

500mm


## ▶ MULTIPLE INSTALLATIONS



Bracket Standing




Base Standing

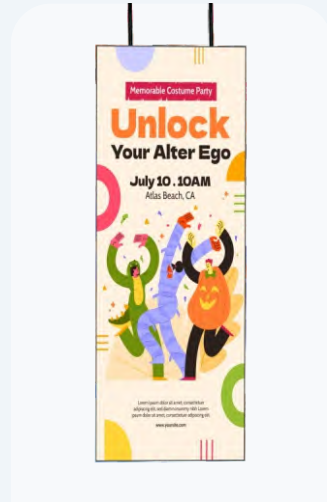

Hanging



Multi-screen Cascade

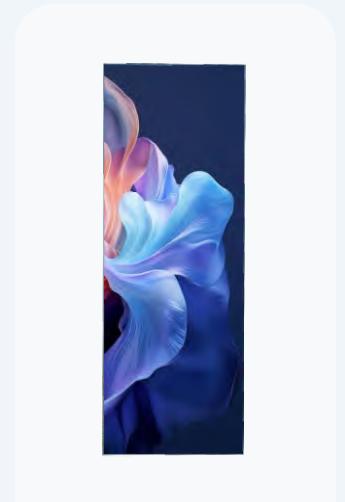

Wall Mounting

## ▶ APPLICATIONS

- | **Exhibitions** – Gallery, Booth
- | **Rental** –Stage, Wedding, hotel, Conference, Competition
- | **Commerce**–Catering, 4S stores, Jewelry stores, Cinemas, Shopping malls
- | **Public** –Government, Medical institutions, Education, Bank, Telecom Public
- | **Public Transport** –Airport, Railway station, Bus station





## User Convenience: Front Maintenance

All component can be replaced from front side  
Convenient and fast.



## Cable Free & Hot Plugging

Integrated hard connection design, support  
hot plug, high stability.



## Easy connection

Easily control by 5G signal ,LAN cable and USB .  
Multiple connection options for confugration.




## Cloud Control

Release programs from the cloud, without  
geographical restrictions, anytime, anywhere.

# TOP-COB Technology High Protection

Through the TOP-COB Process, module surface will be fully sealed with epoxy resin, which gives a fully protection for product against various external influences.

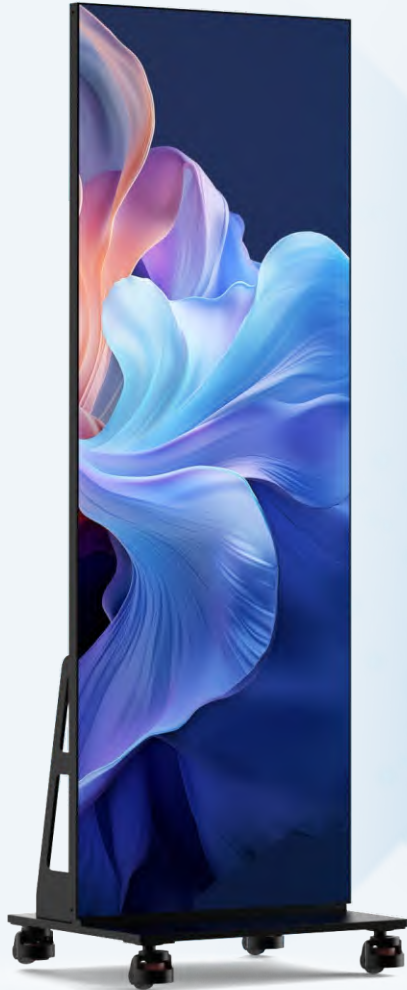

**Dust-proof**



**Damp-proof**



**Abrasion-proof**



**Anti-collision**



**Antistatic**



**Anti-oxidation And Etc**

<b>SPECIFICATION</b>	<b>SPoster 12</b>	<b>SPoster 15</b>	<b>SPoster 18</b>
<b>Pixel Pitch (mm)</b>	1.25	1.56	1.875
<b>Resolution (W×H)</b>	480x1350	384x1080	320x900
<b>External Dimension (mm) (W×H×D)</b>	610x1698x30, pedestal: 600x108x500		
<b>Weight (kg)</b>	45		
<b>Brightness (nits)</b>	800-1000		
<b>Color Temperature K</b>	2500~10000(adjustable)		
<b>Pixel Configuration</b>	COB		
<b>Refresh Rate (Hz)</b>	3840		
<b>Gray Scale (bit)</b>	14~16		
<b>Working Voltage V</b>	AC100~240 50~60Hz)		
<b>Max. Power Consumption(W)</b>	≤450		
<b>Avg. Power Consumption(W)</b>	≤150		
<b>Maintenance Mode</b>	Front access		
<b>Operation Temp (℃)</b>	-10~+40		
<b>Operation Humidity RH</b>	10%~80%		
<b>Communication Mode</b>	WiFi, RJ45, 4G		
<b>Display Mode</b>	Synchronous/Asynchronous		

The parameter index will change according to the specific situation of the project (the product shall be subjected to the submitted oncontract specification)

SPECIFICATION	SPoster 12	SPoster 15	SPoster 18	SPoster 25
Pixel Pitch (mm)	1.25	1.56	1.875	2.5
Resolution (W×H)	480x1350	384x1080	320x900	240x675
External Dimension (mm) (W×H×D)	610x1698x30, pedestal: 600x108x500			
Weight (kg)	45			
Brightness (nits)	600-800			
Color Temperature K	2500~10000(adjustable)			
Pixel Configuration	SMD			
Refresh Rate (Hz)	3840			
Gray Scale (bit)	14~16			
Working Voltage V	AC100~240 50~60Hz)			
Max. Power ConsumptionW	≤500	≤450	≤450	≤450
Avg. Power ConsumptionW	≤170	≤150	≤150	≤150
Maintenance Mode	Front access			
Operation Temp (°C)	-10~+40			
Operation Humidity RH	10%~80%			
Communication Mode	WiFi, RJ45, 4G			
Display Mode	Synchronous/Asynchronous			



## SHENZHEN LP DISPLAY TECHNOLOGY CO., LTD

TEL:+86-755-2350 2825      WEB:www.szlpdisplay.com

ADD:5D-701, Shenzhen Software Industry Base, Haitian Second Road, Nanshan, Shenzhen, Guangdong, China

Company  
Official Website